




Using the BeamFinder

PN: 9301000-9

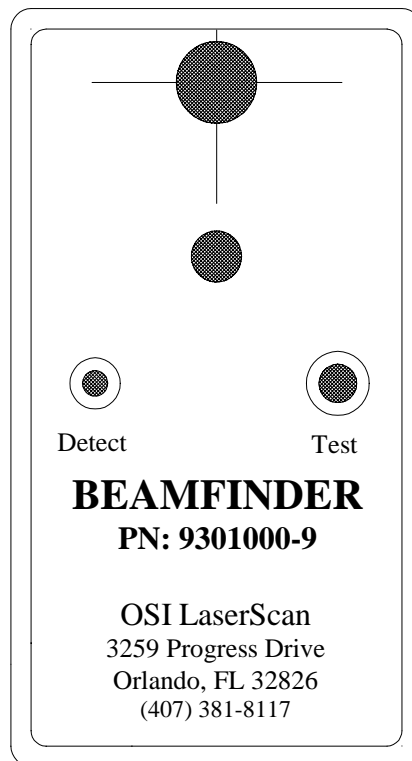

As the Detector (the dark circle with the crosshairs at the top of the unit) is placed into the beam of laser energy, the BeamFinder will emit an audible tone and the “Detect” LED will illuminate. When the detector is no longer in the beam of laser energy, the unit will cease the audible tone and the “Detect” LED will cease to be illuminated. To check the operation of the unit, depress the “Test” button and the unit should emit an audible tone and light the “Detect” LED. If it fails to operate, replace the 9-volt battery.

Note: Battery life will be shortened drastically if the unit is left in direct sunlight.